

ATLAS

ENGINEERED IN IRELAND BY ACTIV8 ENERGIES



ATLAS Duo N48-Type

Engineered specifically for the Irish market



BREAKING THE 20% EFFICIENCY BARRIER

Our panels have broken the 20% efficiency barrier, through Half Cell, TOPCon 5.0, Tiled Cell, N-Type Technology.



INNOVATIVE ALL-WEATHER TECHNOLOGY

Optimal yields, whatever the weather with excellent low-light behaviour in the transitional months here in Ireland.



EXTREME WEATHER RATING

High-tech aluminium alloy frame, certified for high snow and wind loads.



SALT MIST AND AMMONIA RESISTANT

Due to much of our islands proximity to the coast, salt mist is a key aspect of choosing our panels along with ammonia resistance due to Ireland's widespread agricultural use.



ENDURING HIGH PERFORMANCE

Tier 1 manufactured for long-term yield security with Anti-LID Technology, Anti PID Technology, Hot-Spot Protect and Traceable Quality.



ALL-BLACK TECHNOLOGY

Sleek crystalline black appearance, seamlessly blending into rooftops.



Triple Lock Guarantee



460W

Power Range

23.5%

Max Module
Efficiency

≤ 0.4%

30 Year
Degradation

25

Year Product
Warranty

30

Linear Power
Warranty



ISO 9001:2015:ISO Quality Management System
ISO 14001:2015:ISO Environment Management System
ISO 45001:Occupational Health and Safety
© Activ8 Energies
activ8energies.com



TUVNORD




Tier 1
BloombergNEF

MECHANICAL SPECIFICATIONS

Outer dimensions (L x W x H)	1762 x 1134 x 30 mm
Cell type	n-type mono-crystalline
No. of cells	96 (6*16)
Frame technology	Aluminum, black anodized
Front / Back glass	2.0+2.0 mm
Cable length (Including connector)	Landscape: 1200 mm
Cable diameter (IEC/UL)	4 mm ² / 12 AWG
①Maximum mechanical test load	6000 Pa (front) / 4000 Pa (back)
Connector type (IEC/UL)	MC4-EVO2A
Module weight	24,5 kg
Packing unit	36 pcs / box
Weight of packing unit (for 40'HQ container)	927 kg
Modules per 40' HQ container	936 pcs (Subject to sales contract)

① Refer to ATLAS DUO N48-TYPE installation manual or contact technical department.
Maximum Mechanical Test Load=1.5×Maximum Mechanical Design Load.

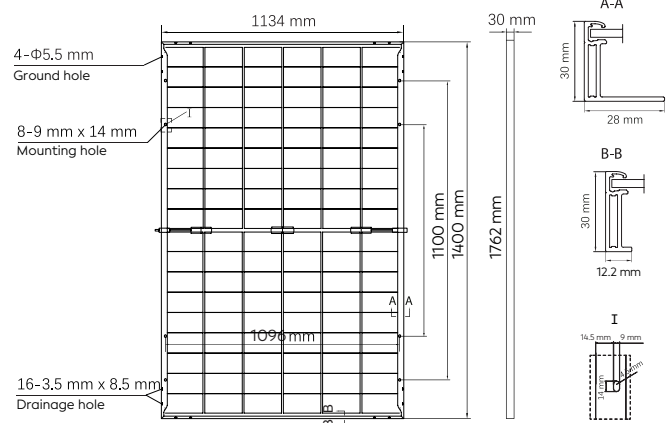

ELECTRICAL SPECIFICATIONS

STC: Irradiance 1000W/m², Cell Temperature 25° C, AM=1.5, Power measurement tolerance: ±3%

Rated output (Pmpp / Wp)	450	455	460	465	470
Rated voltage (Vmpp / V)	30.51	30.65	30.78	30.80	30.82
Rated current (Impp / A)	14.75	14.85	14.94	15.10	15.25
Open circuit voltage (Voc / V)	36.59	36.75	36.91	36.93	36.95
Short circuit current (Isc / A)	15.61	15.71	15.81	15.84	16.00
Module efficiency	22.5%	22.8%	23.0%	23.3%	23.5%

BNPI: Irradiance: front 1000W/m², rear 135W/m², Cell Temperature 25° C, AM=1.5

Rated output (Pmpp / Wp)	495.9	501.4	506.9	512.4	517.9
Rated voltage (Vmpp / V)	30.52	30.66	30.79	30.81	30.83
Rated current (Impp / A)	16.25	16.35	16.46	16.63	16.80
Open circuit voltage (Voc / V)	36.60	36.76	36.92	36.94	36.96
Short circuit current (Isc / A)	17.28	17.39	17.50	17.53	17.86

Temperature Ratings (STC)

Temperature coefficient (Pmpp)	-0.29%/° C
Temperature coefficient (Isc)	+0.043%/° C
Temperature coefficient (Voc)	-0.25%/° C

Operating Parameters

Operating Temperature	-40° C~+85° C
Bifaciality (Pmpp)	80±5%
Junction box IP rating	IP 68
Max. series fuse rating	30 A
Max. system voltage (IEC/UL)	1500V _{DC}

Curve

